
DIGIWAY Plus
Suitability of Installation Questionnaire

Please go over the following set of questions that are crucial to help you choose the right DIGIWAY door operator for your installation. If the questions are answered with a "**YES**", then the **DIGIWAY Plus will fit your installation.** If any of the questions is answered with "**No**", then a heavier duty door operator will be required - the **DIGIWAY SR.**

1] Is the door width 1.2m or less? (see 'Use Conditions' below)

2] Does the door weigh under 120kg? (see 'Use Conditions' below)

3] Can the door swing freely? (i.e. no closing system in the frame, floor or jamb. no detents - hold open device)

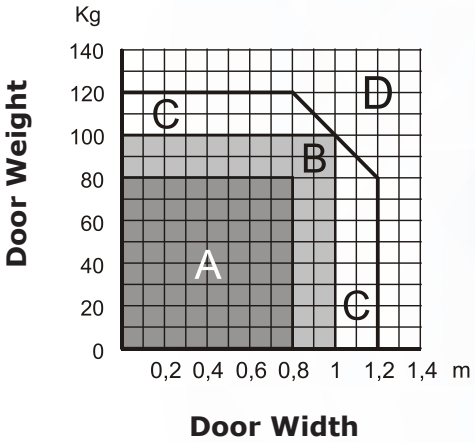

Use Conditions

Zone	Description	Cycles / day
A	Very intense use	600
B	Intense use	200-300
C	Use at reduced speed	<200
D	Not allowed	/



Max. Door Opening Angle

4] Is there a 100mm header above the door?

5] In case of an inward opening door, is the door face flush to the header - i.e. the door is not recessed?

6] In case of an outward opening door, is the reveal depth 300mm or less? (see 'Articulated Arm Installation Dimensions')

CDVI UK
Unit B1 Knaves Beech Business Centre, Loudwater,
High Wycombe HP10 9QR

technical@cdvi.co.uk
Tel: +44 (0) 1628 531300
www.cdvi.co.uk

Application and Usage Questions:

1] Is the door going to be in a busy thoroughfare? i.e. School entrance

2] Is the door to be predominately used by able bodied people in a busy environment?

If the answer to the above questions is "**Yes**", then a heavier duty door operator - the **DIGIWAY SR** - may be required for your installation.

CDVI UK
Unit B1 Knaves Beech Business
Centre, Loudwater,
High Wycombe HP10 9QR

technical@cdvi.co.uk
Tel: +44 (0) 1628 531300
www.cdvi.co.uk